

GRIDDLES **PLANCHAS**

Profesionales y económicas.
Professional and economical.





Serie Novo-Crom

Cromo duro - Hard chrome



NC-40N



Tren de chispas
Multi spark

- Planchas profesionales construidas completamente en acero inoxidable 18/8.
- **Placa de cromo duro** de 15mm de espesor.
- Disponen de cajón recolector en el frontal de la máquina (Modelo 100: 2 cajones).
- **Semi-ranuradas:** Superficie ranurada de 30cm de ancho, excepto modelos 100 que son 40cm.
- ♦ Válvulas termostáticas. ► Encendido por tren de chispas a batería.

- Professional griddles entirely built in 18/8 stainless steel.
- **Hard chrome plate** 15 mm thick.
- They have a collection drawer on the front of the machine (Model 100: 2 drawers).
- **Semi-slotted:** Slotted surface with width of 30 cm, except models 100 which are 40 cm wide.
- ♦ Thermostatic valves. ► Piezoelectric ignition.

Tipo de placa
Type of plate



NC-N
Placa lisa
Smooth plate



NCR-N
Placa semi-ranurada
Half-slotted plate




NCRR-N
Placa ranurada
Slotted plate

EN DOTACIÓN - INCLUDED

Espátula
Muestra de desengrasante
Modelos ranurados:
Espátula ranurada
All models - Spatula
Degreaser sample
Grooved models:
Grooved spatula


Modelos	Medidas exteriores	Superficie útil	Kg neto	kW	Kcal/h	Medidas embalaje	Kg bruto	m³	€
NC-40N	40x44x18h	39,5x43	28	4,1	3.526	51x53x25h	30	0,07	1.036
NC-60N	60x44x18h	59,5x43	40	8,2	7.052	64x53x37h	46	0,12	1.455
NC-80N	80x44x18h	79,5x43	54	12,3	10.528	84x53x37h	60	0,16	1.816
NC-100N	100x44x18h	99,5x43	64	14,9	12.814	104x53x37h	73	0,20	2.083
NCR-60N	60x44x18h	59,5x43	40	8,2	7.052	64x53x37h	46	0,12	1.637
NCR-80N	80x44x18h	79,5x43	54	12,3	10.528	84x53x37h	60	0,16	1.978
NCR-100N	100x44x18h	99,5x43	64	14,9	12.814	104x53x37h	73	0,20	2.262
NCRR-40N	40x44x18h	39,5x43	28	4,1	3.526	51x53x25h	30	0,07	1.383
NCRR-60N	60x44x18h	59,5x43	40	8,2	7.052	64x53x37h	46	0,12	1.800
NCRR-80N	80x44x18h	79,5x43	54	12,3	10.528	84x53x37h	60	0,16	2.150
NCRR-100N	100x44x18h	99,5x43	64	14,9	12.814	104x53x37h	73	0,20	2.499

Situación conexión
Connection situation
● Gas 1/2"



Serie Novo-Crom

Cromo duro - Hard chrome

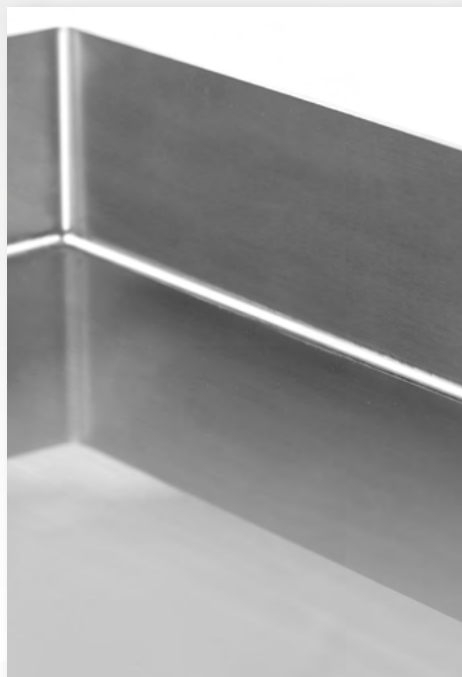

Soldadura hermética
Hermetic welding



NCEM-60N

- Planchas profesionales construidas completamente en acero inoxidable 18/8. ► **Placa de cromo duro** de 15mm de espesor.
- Disponen de cajón recolector en el frontal de la máquina (Modelo 100: 2 cajones).
- **Semi-ranuradas:** Superficie ranurada de 30cm de ancho, excepto modelos 100 que son 40cm.
- ⚡ Termostatos con conmutador de encendido. ► Resistencias blindadas en acero inox.

- Professional griddles entirely built in 18/8 stainless steel ► **Hard chrome griddle** 15 mm thick.
- They have a collection drawer on the front of the machine (Model 100: 2 drawers).
- **Semi-slotted:** Slotted surface with width of 30 cm, except models 100 which are 40 cm wide. **Option: complete slotted.**
- ⚡ Thermostats with ignition switch. ► Stainless steel shielded heating element.

EN DOTACIÓN - INCLUDED

Espátula
Muestra de desengrasante
Modelos ranurados:
Espátula ranurada
All models - Spatula
Degreaser sample
Grooved models:
Grooved spatula

Tipo de placa
Type of plate



NCEM
Placa lisa
Smooth plate



NCREM
Placa semi-ranurada
Half-slotted plate



NCRREM
Placa ranurada
Slotted plate

Modelos	Medidas exteriores	Superficie útil	Kg neto	kW	Medidas embalaje	Kg bruto	m ³	€
NCEM-40N	40x44x18h	39,5x43	29	2,6	51x53x25h	31	0,07	1.131
NCEM-60N	60x44x18h	59,5x43	43	4	64x53x37h	49	0,12	1.534
NCEM-80N	80x44x18h	79,5x43	57	5,3	84x53x37h	63	0,16	1.899
NCEM-100N	100x44x18h	99,5x43	67	6	104x53x37h	75	0,20	2.261
NCREM-60N	60x44x18h	59,5x43	43	4	64x53x37h	49	0,12	1.717
NCREM-80N	80x44x18h	79,5x43	57	5,3	84x53x37h	63	0,16	2.060
NCREM-100N	100x44x18h	99,5x43	67	6	104x53x37h	75	0,20	2.441
NCRREM-40N	40x44x18h	39,5x43	29	2,6	51x53x25h	31	0,07	1.383
NCRREM-60N	60x44x18h	59,5x43	43	4	64x53x37h	49	0,12	1.880
NCRREM-80N	80x44x18h	79,5x43	57	5,3	84x53x37h	63	0,16	2.241
NCRREM-100N	100x44x18h	99,5x43	67	6	104x53x37h	75	0,20	2.680



Monofásico 230 V 50/60Hz
Single-phase 230 V 50/60Hz

Situación conexión
Connection situation
● Eléctrico / Electric





Serie Novo-Snack

Rectificada - Rectified



NSR-80N



Ranuras
Slots

- Planchas profesionales construidas completamente en acero inoxidable 18/8. ► **Placa de acero rectificado** de 15mm de espesor.
- Disponen de cajón recolector en el frontal de la máquina (Modelo 100: 2 cajones).
- **Semi-ranuradas:** Superficie ranurada de 30cm de ancho, excepto modelos 100 que son 40cm.
- ◈ Válvulas de gas con dos intensidades de calor y termopar de seguridad. ► Encendido por tren de chispas a batería.
- Professional griddles entirely built in 18/8 stainless steel ► **Hard chrome griddle** 15 mm thick.
- They have a collection drawer on the front of the machine (Model 100: 2 drawers).
- **Semi-slotted:** Slotted surface with width of 30 cm, except models 100 which are 40 cm wide. **Option: complete slotted.**
- ◈ Gas valves with two heat intensities and safety thermocouple. ► Piezoelectric ignition.

Tipo de placa
Type of plate



NS-N
Placa lisa
Smooth plate



NSR-N
Placa semi-ranurada
Half-slotted plate




NSRR-N
Placa ranurada
Slotted plate

EN DOTACIÓN - INCLUDED

Espátula pequeña
Modelos ranurados:
Espátula ranurada
All models - Small spatula
Grooved models:
Grooved spatula

Situación conexión
Connection situation
● Gas 1/2"



Modelos	Medidas exteriores	Superficie útil	Kg neto	kW	Kcal/h	Medidas embalaje	Kg bruto	m³	€
NS-40N	40x44x18h	39,5x43	28	4,1	3.526	51x53x25h	30	0,07	709
NS-60N	60x44x18h	59,5x43	40	8,2	7.052	64x53x37h	46	0,12	896
NS-80N	80x44x18h	79,5x43	54	12,3	10.528	84x53x37h	60	0,16	1.086
NS-100N	100x44x18h	99,5x43	64	14,9	12.814	104x53x37h	73	0,20	1.346
NSR-60N	60x44x18h	59,5x43	40	8,2	7.052	64x53x37h	46	0,12	1.044
NSR-80N	80x44x18h	79,5x43	54	12,3	10.528	84x53x37h	60	0,16	1.215
NSR-100N	100x44x18h	99,5x43	64	14,9	12.814	104x53x37h	73	0,20	1.505
NSRR-40N	40x44x18h	39,5x43	28	4,1	3.526	51x53x25h	30	0,07	977
NSRR-60N	60x44x18h	59,5x43	40	8,2	7.052	64x53x37h	46	0,12	1.245
NSRR-80N	80x44x18h	79,5x43	54	12,3	10.528	84x53x37h	60	0,16	1.456
NSRR-100N	100x44x18h	99,5x43	64	14,9	12.814	104x53x37h	73	0,20	1.746

Serie Novo-Snack

Rectificada - Rectified



Cajón recolector
Collection drawer



NSEM-80N

- Planchas profesionales construidas completamente en acero inoxidable 18/8. ► **Placa de acero rectificado** de 15mm de espesor.
- Disponen de cajón recolector en el frontal de la máquina (Modelo 100: 2 cajones).
- **Semi-ranuradas:** Superficie ranurada de 30cm de ancho, excepto modelos 100 que son 40cm.
- ⚡ Termostatos con conmutador de encendido. ► Resistencias blindadas en acero inox.

- Professional griddles entirely built in 18/8 stainless steel ► **Hard chrome griddle** 15 mm thick.
- They have a collection drawer on the front of the machine (Model 100: 2 drawers).
- **Semi-slotted:** Slotted surface with width of 30 cm, except models 100 which are 40 cm wide. **Option: complete slotted.**
- ⚡ Thermostats with ignition switch. ► Stainless steel shielded heating element.

Tipo de placa
Type of plate



NSEM
Placa lisa
Smooth plate



NSREM
Placa semi-ranurada
Half-slotted plate



NSRREM
Placa ranurada
Slotted plate

EN DOTACIÓN - INCLUDED


Espátula pequeña
Modelos ranurados:
Espátula ranurada
All models - Small spatula
Grooved models:
Grooved spatula

Modelos	Medidas exteriores	Superficie útil	Kg neto	kW	Medidas embalaje	Kg bruto	m³	€
NSEM-40N	40x44x18h	39,5x43	29	2,6	51x53x25h	31	0,07	895
NSEM-60N	60x44x18h	59,5x43	43	4	64x53x37h	49	0,12	1.029
NSEM-80N	80x44x18h	79,5x43	57	5,3	84x53x37h	63	0,16	1.259
NSEM-100N	100x44x18h	99,5x43	67	6	104x53x37h	75	0,20	1.526
NSREM-60N	60x44x18h	59,5x43	43	4	64x53x37h	49	0,12	1.177
NSREM-80N	80x44x18h	79,5x43	57	5,3	84x53x37h	63	0,16	1.400
NSREM-100N	100x44x18h	99,5x43	67	6	104x53x37h	75	0,20	1.696
NSRREM-40N	40x44x18h	39,5x43	29	2,6	51x53x25h	31	0,07	1.165
NSRREM-60N	60x44x18h	59,5x43	43	4	64x53x37h	49	0,12	1.349
NSRREM-80N	80x44x18h	79,5x43	57	5,3	84x53x37h	63	0,16	1.635
NSRREM-100N	100x44x18h	99,5x43	67	6	104x53x37h	75	0,20	1.926



Monofásico 230 V 50/60 Hz
Single-phase 230 V 50/60 Hz

Situación conexión
Connection situation
● Eléctrico / Electric





Serie Novo-Foc

Cromo duro & Rectificada - Hard chrome & rectified




NCF-60N



Detalle fogón de 6 kW
Detail 6 kW's ring

► Planchas profesionales construidas completamente en acero inoxidable 18/8. ► **Placa de cromo duro** de 15 mm de espesor (modelo NCF) o **placa rectificada** de 15mm de espesor (modelo NSF). ► Disponen de cajón recolector en el frontal de la máquina.
 🔥 Encendido por tren de chispas a batería. **NCF:** Válvulas termostáticas. **NSF:** Válvulas de gas con termopar de seguridad.
 🔥 FOGÓN: 6 Kw de potencia Ø 120mm. ► Encendido por tren de chispas a batería.
OPCIÓN: Rejilla reductora (Z-533009200)

► Professional griddles entirely built in 18/8 stainless. ► **Hard chrome griddle** 15 mm thick (Model NCF) or **Rectified griddle** 12 mm thick (Model NSF). ► They have a collection drawer on the front of the machine.
 🔥 Ignition by battery piezoelectric. **NCF:** Thermostatic valves. **NSF:** Gas valves with safety thermocouple.
 🔥 RING: 6 kW of power and Ø 120 mm. ► Ignition by battery piezoelectric. OPTION: Reducer rack (Z-533009200)



Y-533009200
Grille de réduction de feu
Stove reduction grill

Tipo de placa
Type of plate




EN DOTACIÓN - INCLUDED

Espátula pequeña
Modelos de cromo duro:
Muestra de desengrasante
Small spatula
Hard chrome models:
Sample of degreaser


Modelos	Medidas exteriores	Superficie útil	Kg neto	kW	Kcal/h	Medidas embalaje	Kg bruto	m³	€
NCF-60N	90,5x44x18h	59,5x43	51	14,	12.212	104x53x37h	58	0,20	1.938
NSF-60N	90,5x44x18h	59,5x43	51	14,2	12.212	104x53x37h	58	0,20	1.343
NCFR-60N	90,5x44x18h	59,5x43	51	14,2	12.212	104x53x37h	58	0,20	2.095
NSFR-60N	90,5x44x18h	59,5x43	51	14,2	12.212	104x53x37h	58	0,20	1.477
Y-533009200	27x27	25x25	-	-	-	28x28	0,2	-	42

Situación conexión
Connection situation
● Gas 1/2"



Serie Sandwichera

Adaptable en todos los modelos
Adaptable on all models

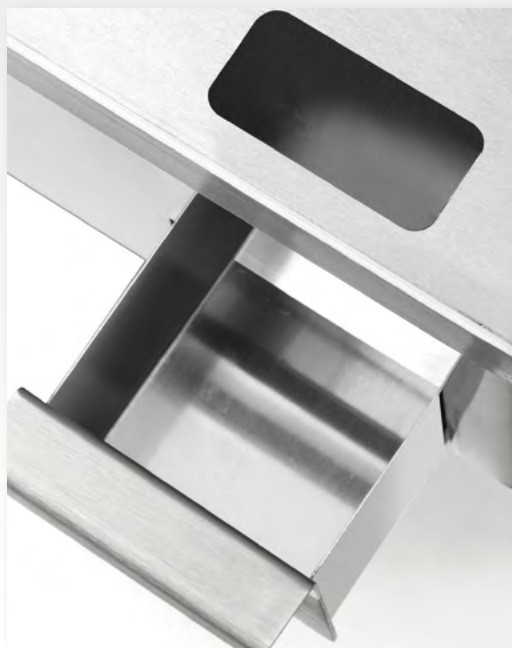

Cajón recolector
Collection box



NC-100N + SW-35



Placa adaptable al alimento
Food-adaptable plate



NS-100N + SW-35

► Grill en acero inoxidable 18/8, con placa calefactora en acero inoxidable 18/8 de 3 mm de espesor y de 1000W de potencia.

GRILL ADAPTABLE A CUALQUIER PLANCHA PROFESIONAL DE MAINHO.


► Grill in 18/8 stainless steel, with heating plate in 18/8 stainless steel 3 mm thick and 1000W power.

GRILL ADAPTABLE TO ANY PROFESSIONAL MAINHO GRIDDLE.



Monofásico 230 V 50/60 Hz
Single-phase 230 V 50/60 Hz

Situación conexión
Connection situation
● Eléctrico



Modelos	Medidas exteriores	Superficie útil	Kg neto	Kg bruto	kW	m ³	€
SW-35	41,5x53x17h	35x35	12,5	-	1	-	919

Equipamiento & accesorios

Equipment & accessories



EST-2
Estante
Shelf

SB-1
Soporte
botellas
Trolley bottle
support

NC-80 + TB-80 + EST-2 + BS-1
NC-80 + TB-80 + EST-2 + SB-1



Funda (COB)
Griddle cover



Tapa basculante cerrada (TB)
Griddle tilting lid

Spatula
Small spatula
Hard chrome scraper
Slotted scraper
Degreaser 12 u.
Degreaser 6 u.
Degreaser 1 u.
Griddle cover NC - NS
Griddle cover NC - NS
Griddle cover NC - NS
Griddle cover NC - NS
Griddle tilting lid NC - NS
Griddle tilting lid NC - NS
Griddle tilting lid NC - NS
Trolley shelf CNE
Trolley bottle support CNE-80
Griddle trolley (NC - NE - NS)
Griddle trolley (NC - NE - NS)
Griddle trolley (NC - NE - NS)

Ref.	Descripción	Medidas Exteriores	Kg Neto	Medidas Embalaje	Kg Bruto	m³	€
Z-E-1	Espátula	-	100g	31x12x4h	170g	-	14
Z-E-2	Espátula pequeña	-	65g	31x12x4h	135g	-	13
Z-C-1	Rasqueta de cromo duro	-	240g	31x12x4h	310g	-	47
Z-C-2	Rasqueta ranurada	-	195g	31x12x4h	265g	-	18
ZK-PAC-12	Desengrasante 12 uds	-	13,3	37x29x27h	14,5	0,02	250
ZK-PAC-6	Desengrasante 6 uds	-	6,6	28x19,5x27h	7,5	0,01	132
ZK-PAC-1	Desengrasante 1 ud	-	1,1	7x9x24h	-	-	34
COB-45	Funda de planchas NC - NS	47x47x25h	205g	-	-	-	36
COB-60	Funda de planchas NC - NS	62x47x25h	250g	-	-	-	49
COB-80	Funda de planchas NC - NS	82x47x25h	305g	-	-	-	55
COB-100	Funda de planchas NC - NS	102x47x25h	350g	-	-	-	70
TB-40	Tapa basculante planchas (NC - NS)	41x46x15h	3	47x42x17h	4	0,03	205
TB-60	Tapa basculante planchas (NC - NS)	61x46x15h	5	64x49x17h	6	0,05	228
TB-80	Tapa basculante planchas (NC - NS)	81x46x15h	5,5	84x49x17h	7	0,07	246
EST-2	Estante carro CNE	30x43x11h	2	32x44x12h	2,5	0,02	122
SB-1	Soporte botellas carro CNE-80	31,5x30x96h	1,5	32x31x15h	2	0,01	139
C-NE-60	Carro planchas (NC - NE - NS)	60x43x79h	17,5	68x65x17h	19,5	0,09	910
C-NE-80	Carro planchas (NC - NE - NS)	80x43x79h	24	88x65x17h	26	0,09	922
C-NE-100	Carro planchas (NC - NE - NS)	100x43x79h	30,5	108x65x17h	32,5	0,09	1.103